



Industrial Power Supplies

Industrial Power Supplies

Featured Series

Force-GT

Full load operating temperature up to 60°C
Power Range: 120 - 960 W

LYTE II

Ultra slim design to save installation space
Power Range: 120 - 480 W

PMR

Built-in active PFC with 30 mm height
Power Range: 150 - 600 W

PMT2

Complete product line with 30 mm height
Power Range: 35 - 350 W



DIN Rail Power Supplies



Force-GT

LYTE / LYTE II

CliQ II / CliQ III

CliQ M / CliQ VA

CHROME / CHROME II

SYNC



Series	Model Name*	PFC	Output			Input Voltage Range	Dimensions in mm (H x W x D)
			Voltage	Current	Power		
Force-GT <ul style="list-style-type: none"> Built-in constant current circuit for charging applications Ultra slim design 	DRF-12V120W1G□□	●	12 V	10.0 A	120 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	123.6 x 30 x 116.8
	DRF-12V240W1G□□	●		20.0 A	240 W		123.6 x 40 x 116.8
	DRF-24V120W1G□□	●	24 V	5.0 A	120 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	123.6 x 30 x 116.8
	DRF-24V240W1G□□	●		10.0 A	240 W		123.6 x 40 x 116.8
	DRF-24V480W1G□□	●		20.0 A	480 W	123.6 x 56 x 116.8	
	DRF-48V120W1G□□	●	48 V	2.5 A	120 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	123.6 x 30 x 116.8
	DRF-48V240W1G□□	●		5.0 A	240 W		123.6 x 40 x 116.8
	DRF-48V480W1G□□	●		10.0 A	480 W	123.6 x 56 x 116.8	
	DRF-24V120W3G□□		24 V	5.0 A	120 W	3 x 320-575 V _{AC} (3-Phase) or 2 x 340-575 V _{AC} (2-Phase) (DC input range 450-800 V _{DC})	124 x 38 x 125.3
	DRF-24V240W3G□□			10.0 A	240 W		124 x 50 x 125.3
	DRF-24V480W3G□□	●		20.0 A	480 W		124 x 65 x 127.3
DRF-24V960W3G□□	●		40.0 A	960 W	124 x 110 x 128.7		
LYTE <ul style="list-style-type: none"> Competitively priced Built-in constant current circuit 	DRL-12V75W1AZ□		12 V	6.25 A	75 W	85-264 V _{AC}	123.6 x 27 x 102
	DRL-24V75W1AZ□		24 V	3.125 A	75 W	85-264 V _{AC}	123.6 x 27 x 102
	DRL-48V75W1AZ□		48 V	1.57 A	75.36 W	85-264 V _{AC}	123.6 x 27 x 102
LYTE II <ul style="list-style-type: none"> Ultra slim design Reduced no-load power consumption Wide operating temperature 	DRL-12V120W1E□□		12 V	10.0 A	120 W	90-264 V _{AC}	123.6 x 30 x 116.8
	DRL-12V240W1E□□	●		20.0 A	240 W		123.6 x 40 x 116.8
	DRL-24V120W1E□□		24 V	5.0 A	120 W	90-264 V _{AC}	123.6 x 30 x 116.8
	DRL-24V240W1E□□	●		10.0 A	240 W		123.6 x 40 x 116.8
	DRL-24V480W1E□□	●		20.0 A	480 W	123.6 x 56 x 116.8	
	DRL-48V120W1E□□		48 V	2.5 A	120 W	90-264 V _{AC}	123.6 x 30 x 116.8
	DRL-48V240W1E□□	●		5.0 A	240 W		123.6 x 40 x 116.8
DRL-48V480W1E□□	●		10.0 A	480 W	123.6 x 56 x 116.8		

Series	Model Name*	PFC	Output			Input Voltage Range	Dimensions in mm (H × W × D)		
			Voltage	Current	Power				
CliQ II <ul style="list-style-type: none"> IP20 connector Power Boost up to 5s 	DRP024V060W1B□		24 V	2.5 A	60 W	85-264 V _{AC} (DC input range 120-375 V _{DC})	121 × 32 × 125		
	DRP024V120W1B□			5.0 A	120 W		121 × 50 × 123.1		
	DRP024V240W1B□	●		10.0 A	240 W		121 × 85 × 124.1		
	DRP024V480W1B□	●		20.0 A	480 W		121 × 144 × 118.6		
	DRP024V060W1N□			2.5 A	60 W		120.6 × 32 × 119.3		
	DRP-24V100W1NN	●		3.8 A	91.2 W		124 × 40 × 124		
	DRP-24V120W2BN			5.0 A	120 W		2 × 180-550 V _{AC} or 180-305 V _{AC} (Single Phase) (DC input range 254-780 V _{DC})	124 × 40 × 117	
	DRP-24V240W2BN	●		10.0 A	240 W		124 × 60 × 117		
	DRP024V060W3B□			2.5 A	60 W		3 × 320-600 V _{AC} or 2 × 360-600 V _{AC} (DC input range 450-800 V _{DC})	121 × 50 × 117.3	
	DRP024V120W3B□			5.0 A	120 W		121 × 50 × 117.3		
	DRP024V240W3B□			10.0 A	240 W		For 960 W: 121 × 70 × 117.3		
	DRP024V480W3B□	●		20.0 A	480 W		3 × 320-600 V _{AC} or 2 × 380-600 V _{AC} (DC input range 450-800 V _{DC})	121 × 140 × 117.3	
	DRP024V960W3BN	●		40.0 A	960 W		121 × 255 × 117.3		
	DRP048V060W1B□			48 V	1.25 A		60 W	85-264 V _{AC} (DC input range 120-375 V _{DC})	121 × 32 × 125
	DRP048V120W1B□	●			2.5 A		120 W		121 × 50 × 123.1
	DRP048V240W1B□	●			5.0 A		240 W		121 × 85 × 124.1
DRP048V480W1B□	●	10.0 A	480 W		121 × 144 × 118.6				
CliQ III <ul style="list-style-type: none"> Slim design with high power density Power Boost up to 5s 	DRP-24V120W1CAN	●	24 V	5.0 A	120 W	88-264 V _{AC}	124 × 40 × 117		
	DRP-24V120W1CBN	●		5.0 A	120 W	88-264 V _{AC} (DC input range 88-375 V _{DC})	124 × 40 × 117		
	DRP-24V240W1CAN	●		10.0 A	240 W	88-264 V _{AC}	124 × 60 × 117		
	DRP-24V240W1CBN	●		10.0 A	240 W	88-264 V _{AC} (DC input range 88-375 V _{DC})	124 × 60 × 117		
	DRP-24V480W1CAN	●		20.0 A	480 W	88-264 V _{AC}	124 × 82 × 127		
	DRP-24V480W1CBN	●		20.0 A	480 W	88-264 V _{AC} (DC input range 88-375 V _{DC})	124 × 82 × 127		
CliQ M <ul style="list-style-type: none"> Slim design with high power density Advanced Power Boost Maritime approvals 	DRM-24V80W1PN	●	24 V	3.4 A	81.6 W	85-276 V _{AC} (DC input range 88-375 V _{DC})	124 × 32 × 102		
	DRM-24V120W1PN	●		5.0 A	120 W	85-264 V _{AC} (DC input range 88-375 V _{DC})	124 × 40 × 117		
	DRM-24V240W1PN	●		10.0 A	240 W	85-276 V _{AC} (DC input range 88-375 V _{DC})	124 × 60 × 117		
	DRM-24V480W1PN	●		20.0 A	480 W		124 × 82 × 127		
	DRM-24V960W1PN	●		40.0 A	960 W	85-264 V _{AC}	124 × 125 × 133.6		
	DRM-24V480W3PN	●		20.0 A	480 W	3 × 320-600 V _{AC} or 2 × 380-600 V _{AC}	124 × 65 × 127.1		
	DRM-24V960W3PN	●		40.0 A	960 W		124 × 110 × 128.6		
	DRM-24V480W1SN	●		20.0 A	480 W	85-276 V _{AC} (DC input range 88-375 V _{DC})	124 × 82 × 127		
CliQ VA <ul style="list-style-type: none"> Smart monitoring function Advanced Power Boost 	DRV-24V120W1PN	●	24 V	5.0 A	120 W	85-264 V _{AC} (DC input range 88-375 V _{DC})	124 × 60 × 139		
	DRV-24V240W1PN	●		10.0 A	240 W	85-276 V _{AC} (DC input range 88-375 V _{DC})	124 × 60 × 139		
	DRV-24V480W1PN	●		20.0 A	480 W		124 × 82 × 149		
CHROME <ul style="list-style-type: none"> Compact Class II double isolation NEC Class 2 	DRC-5V10W1A□		5 V	1.5 A	7.5 W	90-264 V _{AC}	91 × 18 × 55.6		
	DRC-12V10W1A□		12 V	0.83 A	10 W	90-264 V _{AC}	91 × 18 × 55.6		
	DRC-12V30W1A□			2.1 A	25.2 W		91 × 53 × 55.6		
	DRC-12V60W1A□			4.5 A	54 W		91 × 71 × 55.6		
	DRC-12V60W1CZ		4.5 A	54 W	90-264 V _{AC} (DC input range 125-375 V _{DC})	91 × 71 × 55.6			
	DRC-12V100W1AZ		6.0 A	72 W	90-264 V _{AC}	91 × 89.9 × 55.6			
	DRC-24V10W1A□		24 V	0.42 A	10 W	90-264 V _{AC}	91 × 18 × 55.6		
	DRC-24V10W1HZ			0.42 A	10 W		91 × 18 × 55.6		
	DRC-24V30W1A□			1.25 A	30 W		91 × 53 × 55.6		
	DRC-24V60W1A□			2.5 A	60 W		91 × 71 × 55.6		
	DRC-24V100W1A□			3.8 A	91.2 W		90-264 V _{AC} (DC input range 125-375 V _{DC})	91 × 89.9 × 55.6	
CHROME II <ul style="list-style-type: none"> Low no-load power consumption & meet with DOE VI NEC Class 2 / Limited Power Source (LPS) certified Over Voltage Category III 	DRC-12V030W1RZ		12 V	2.0 A	24 W	85-264 V _{AC}	87.5 × 35 × 55		
	DRC-12V060W1RZ			4.5 A	54 W		87.5 × 52.5 × 55		
	DRC-12V100W1RZ			7.1 A	85.2 W		87.5 × 70 × 55		
	DRC-24V030W1RZ		24 V	1.5 A	36 W	85-264 V _{AC}	87.5 × 35 × 55		
	DRC-24V060W1RZ			2.5 A	60 W		87.5 × 52.5 × 55		
	DRC-24V100W1RZ			3.83 A	91.92 W		87.5 × 70 × 55		
	DRC-48V060W1RZ		48 V	1.25 A	60 W	85-264 V _{AC}	87.5 × 52.5 × 55		
DRC-48V100W1RZ		1.92 A		92.16 W	87.5 × 70 × 55				
SYNC <ul style="list-style-type: none"> Compact NEC Class 2 Competitively priced 	DRS-5V30W1NZ		5 V	3.0 A	15 W	85-264 V _{AC} (DC input range 120-375 V _{DC})	75 × 21 × 89.5		
	DRS-5V50W1A□			6.0 A	30 W		75 × 30 × 89.5		
	DRS-5V50W1N□			5.0 A	25 W		75 × 30 × 89.5		
	DRS-12V50W1N□		12 V	4.0 A	48 W	85-264 V _{AC} (DC input range 120-375 V _{DC})	75 × 30 × 89.5		
	DRS-24V30W1AZ		24 V	1.25 A	30 W	85-264 V _{AC}	75 × 21 × 89.5		
	DRS-24V30W1NZ			1.25 A	30 W	85-264 V _{AC} (DC input range 120-375 V _{DC})	75 × 21 × 89.5		
	DRS-24V50W1N□			2.1 A	50 W		75 × 30 × 89.5		
	DRS-24V100W1A□			4.0 A	96 W		75 × 45 × 100		
	DRS-24V100W1N□			3.8 A	91.2 W		75 × 45 × 100		

*For options, please refer to the technical datasheet

Industrial Power Supplies

Panel Mount Power Supplies




Series	Model Name*	PFC	Output			Input Voltage Range	Dimensions in mm (L x W x H)
			Voltage	Current	Power		
PMR <ul style="list-style-type: none"> Built-in PFC IEC 60335, IEC 61558 approvals Low profile 30mm height 	PMR-4V320WC□A	●	4.2 V	60.0 A	252 W	88-264 V _{AC}	215 × 115 × 30
	PMR-4V320WD□A	●		60.0 A	252 W		215 × 115 × 30
	PMR-5V320WC□A	●	5 V	60.0 A	300 W	88-264 V _{AC}	215 × 115 × 30
	PMR-5V320WD□A	●		60.0 A	300 W		215 × 115 × 30
	NEW PMR-12V150W1AT	●	12 V	12.5 A	150 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	129 × 97 × 30
	NEW PMR-12V240W1AT	●		20.0 A	240 W	90-264 V _{AC}	159 × 97 × 30
	NEW PMR-12V320W1AT	●		26.7 A	320.4 W		215 × 115 × 30
	NEW PMR-12V600W1BT	●		50.0 A	600 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	225 × 124 × 41
	NEW PMR-24V150W1AT	●	24 V	6.3 A	150 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	129 × 97 × 30
	NEW PMR-24V240W1AT	●		10.0 A	240 W	90-264 V _{AC}	159 × 97 × 30
	NEW PMR-24V320W1AT	●		13.4 A	321.6 W		215 × 115 × 30
	NEW PMR-24V600W1BT	●		25.0 A	600 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	225 × 124 × 41
	NEW PMR-36V150W1AT	●	36 V	4.2 A	150 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	129 × 97 × 30
	NEW PMR-36V240W1AT	●		6.7A	241.2 W	90-264 V _{AC}	159 × 97 × 30
	NEW PMR-36V320W1AT	●		8.9 A	320.4 W		215 × 115 × 30
	NEW PMR-36V600W1BT	●		16.7 A	600 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	225 × 124 × 41
	NEW PMR-48V150W1AT	●	48 V	3.1 A	150 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	129 × 97 × 30
	NEW PMR-48V240W1AT	●		5.0 A	240 W	90-264 V _{AC}	159 × 97 × 30
NEW PMR-48V320W1AT	●		6.7 A	321.6 W		215 × 115 × 30	
NEW PMR-48V600W1BT	●		12.5 A	600 W	90-264 V _{AC} (DC input range 127-375 V _{DC})	225 × 124 × 41	
PMT2 <ul style="list-style-type: none"> Low profile 30mm height IEC 60335, IEC 61558 approvals 	PMT-12V35W2BA□		12 V	3.0 A	36 W	90-264 V _{AC}	99 × 82 × 29
	PMT-12V50W2BA□			4.2 A	50.4 W		99 × 82 × 29
	PMT-12V75W2BA□			6.0 A	72 W		99 × 97 × 30
	PMT-12V100W2BA□			8.5 A	102 W		129 × 97 × 30
	PMT-12V150W2BA□			12.5 A	150 W	90-132 V _{AC} , 180-264 V _{AC} (Selectable by Switch)	159 × 97 × 30
	PMT-12V150W2CA□			12.5 A	150 W	90-264 V _{AC}	159 × 97 × 30
	PMT-12V200W2B□			17.0 A	204 W	90-132 V _{AC} , 180-264 V _{AC} (Selectable by Switch)	159 × 97 × 30
	PMT-12V200W2BR□			17.0 A	204 W		159 × 97 × 30
	PMT-12V350W2B□			29.0 A	348 W		215 × 115 × 30
	PMT-12V350W2BR□			29.0 A	348 W		215 × 115 × 30
	PMT-15V35W2BA		15 V	2.4 A	36 W	90-264 V _{AC}	99 × 82 × 29
	PMT-15V50W2BA			3.4 A	51 W		99 × 82 × 29
	PMT-15V75W2BA			5.0 A	75 W		99 × 97 × 30
	PMT-15V100W2BA			7.0 A	105 W		129 × 97 × 30
	PMT-15V150W2BA			10.0 A	150 W	90-132 V _{AC} , 180-264 V _{AC} (Selectable by Switch)	159 × 97 × 30
	PMT-15V150W2CA			10.0 A	150 W	90-264 V _{AC}	159 × 97 × 30
	PMT-24V35W2BA□		24 V	1.5 A	36 W	90-264 V _{AC}	99 × 82 × 29
	PMT-24V50W2BA□			2.2 A	52.8 W		99 × 82 × 29
	PMT-24V75W2BA□			3.2 A	76.8 W		99 × 97 × 30
	PMT-24V100W2BA□			4.5 A	108 W		129 × 97 × 30
	PMT-24V150W2BA□			6.25 A	150 W	90-132 V _{AC} , 180-264 V _{AC} (Selectable by Switch)	159 × 97 × 30
	PMT-24V150W2CA□			6.25 A	150 W	90-264 V _{AC}	159 × 97 × 30
	PMT-24V200W2B□			8.8 A	211.2 W	90-132 V _{AC} , 180-264 V _{AC} (Selectable by Switch)	159 × 97 × 30
	PMT-24V200W2BR□			8.8 A	211.2 W		159 × 97 × 30
	PMT-24V350W2B□			14.6 A	350.4 W		215 × 115 × 30
	PMT-24V350W2BR□			14.6 A	350.4 W		215 × 115 × 30
	PMT-30V35W2BA		30 V	1.2 A	36 W	90-264 V _{AC}	99 × 82 × 29
	PMT-30V50W2BA			1.7 A	51 W		99 × 82 × 29
PMT-30V75W2BA			2.5 A	75 W	99 × 97 × 30		
PMT-30V100W2BA			3.6 A	108 W	129 × 97 × 30		

*For options, please refer to the technical datasheet

Series	Model Name*	PFC	Output Voltage			Input Voltage Range	Dimensions in mm (L x W x H)		
			Voltage	Current	Power				
PMT2 <ul style="list-style-type: none"> IEC 60335, IEC 61558 approvals Low profile 30mm height 	PMT-30V150W2BA		30 V	5.0 A	150 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	159 × 97 × 30		
	PMT-30V150W2CA			5.0 A	150 W	90-264 V _{AC}	159 × 97 × 30		
	PMT-36V35W2BA		36 V	1.0 A	36 W	90-264 V _{AC}	99 × 82 × 29		
	PMT-36V50W2BA			1.45 A	52.2 W		99 × 82 × 29		
	PMT-36V75W2BA			2.1 A	75.6 W		99 × 97 × 30		
	PMT-36V100W2BA			3.0 A	108 W		129 × 97 × 30		
	PMT-36V150W2BA			4.3 A	154.8 W		90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	159 × 97 × 30	
	PMT-36V150W2CA			4.3 A	154.8 W		90-264 V _{AC}	159 × 97 × 30	
	PMT-36V200W2BM		5.9 A	212.4 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	159 × 97 × 30			
	PMT-36V200W2BR		5.9 A	212.4 W		159 × 97 × 30			
	PMT-36V350W2BM		9.7 A	349.2 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	215 × 115 × 30			
	PMT-36V350W2BR		9.7 A	349.2 W		215 × 115 × 30			
	PMT-48V35W2BA		48 V	0.8 A	38.4 W	90-264 V _{AC}	99 × 82 × 29		
	PMT-48V50W2BA			1.1 A	52.8 W		99 × 82 × 29		
	PMT-48V75W2BA			1.6 A	76.8 W		99 × 97 × 30		
	PMT-48V100W2BA			2.3 A	110.4 W		129 × 97 × 30		
	PMT-48V150W2BA			3.3 A	158.4 W		90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	159 × 97 × 30	
	PMT-48V150W2CA			3.3 A	158.4 W		90-264 V _{AC}	159 × 97 × 30	
	PMT-48V200W2BM		4.4 A	211.2 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	159 × 97 × 30			
	PMT-48V200W2BR		4.4 A	211.2 W		159 × 97 × 30			
	PMT-48V350W2BM		7.3 A	350.4 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	215 × 115 × 30			
	PMT-48V350W2BR		7.3 A	350.4 W		215 × 115 × 30			
	PMT-D1V75W2□A			5 V/12 V	5.0 A/4.0 A	73 W	90-264 V _{AC}	129 × 97 × 30	
PMT-D2V75W2□A			5 V/24 V	5.0 A/2.1 A	75.4 W		129 × 97 × 30		
PMC <ul style="list-style-type: none"> Universal AC input voltage 	PMC-05V015W1AA		5 V	3.0 A	15 W	85-264 V _{AC} (DC input range 125-375 V _{DC})	77 × 51 × 28		
	PMC-12V150W1B□	●	12 V	12.5 A	150 W	85-264 V _{AC} (DC input range 125-375 V _{DC})	178 × 97 × 38		
	PMC-12V600W1BA	●		50.0 A	600 W		85-264 V _{AC} (DC input range 125-370 V _{DC})	215 × 120 × 61	
	PMC-24V150W1B□	●	24 V	6.25 A	150 W	85-264 V _{AC} (DC input range 125-375 V _{DC})	178 × 97 × 38		
	PMC-24V300W1BA	●		V _i : 12.5 A V _{SB} : 0.50 A	300 W		199 × 105 × 41		
	PMC-24V600W1BA	●		25.0 A	600 W	85-264 V _{AC} (DC input range 125-370 V _{DC})	215 × 120 × 61		
	PMC-24V600W1RW	●		25.0 A	600 W	85-264 V _{AC}	190 × 120 × 61		
	PMC-48V150W1BA	●	48 V	3.125 A	150 W	85-264 V _{AC} (DC input range 125-375 V _{DC})	178 × 97 × 38		
	PMC-48V600W1BA	●		12.5 A	600 W		85-264 V _{AC} (DC input range 125-370 V _{DC})	215 × 120 × 61	
	PMC-DSPV100W1A		24 V / 5 V	2.7 A / 7.0 A	100 W	85-264 V _{AC} (DC input range 125-375 V _{DC})	178 × 97 × 38		
PMF <ul style="list-style-type: none"> Remote ON/OFF Built-in PFC 	PMF-4V320WC□□	●	4.2 V	55.0 A	231 W	88-264 V _{AC}	215 × 115 × 50		
	PMF-5V320WC□□	●	5 V	55.0 A	275 W	88-264 V _{AC}	215 × 115 × 50		
	PMF-24V240WC□□	●	24 V	10.0 A	240 W	88-264 V _{AC}	190 × 93 × 50		
	PMF-24V320WC□□	●		13.3 A	320 W		88-264 V _{AC}	215 × 115 × 50	
PMU <ul style="list-style-type: none"> Power supply with integrated DC-UPS 	PMU-13V155W□BA		13.8 V	V1: 9.5 A B+: 1.5 A	151 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	178 × 97 × 38		
	PMU-13V155W□CA				151 W		178 × 97 × 38		
	PMU-27V155W□BA		27.6 V	Enclosed V1: 4.0 A B+: 1.5 A L Frame V1: 4.3 A B+: 1.2 A	151 W	90-132V _{AC} , 180-264V _{AC} (Selectable by Switch)	178 × 97 × 38		
	PMU-27V155W□CA				151 W		178 × 97 × 38		
MEB <ul style="list-style-type: none"> Intelligent fan speed control 	MEB-750A12B AAA	●	12 V	58.4 A	700 W	85-264 V _{AC}	177.8 × 101.6 × 40		
	MEB-750A12T AAA	●			700 W		177.8 × 101.6 × 40		
	MEB-500A24F AA	●	24 V	21.0 A	500 W	90-264 V _{AC}	165.3 × 85.2 × 41		
	MEB-750A24B AAA	●			750 W		85-264 V _{AC}	177.8 × 101.6 × 40	
	MEB-750A24T AAA	●			750 W			177.8 × 101.6 × 40	
	MEB-1K2A24T ABA	●			50.0 A		1,200 W	204 × 127 × 40.5	
	MEB-1K5A24T ABA	●			60.0 A		1,500 W	90-264 V _{AC}	204 × 127 × 40.5
	MEB-2K5A24T AAA	●			104.2 A		2,500 W	85-264 V _{AC}	310.8 × 127 × 40.5
	MEB-2K5A36T AAA	●	36 V	69.5 A	2,500 W	85-264 V _{AC}	310.8 × 127 × 40.5		
	MEB-1K2A42T ABA	●			42 V		28.5 A	1,200 W	85-264 V _{AC}
	MEB-750A48B AAA	●	48 V	15.63 A	750 W	85-264 V _{AC}	177.8 × 101.6 × 40		
	MEB-750A48T AAA	●			750 W		177.8 × 101.6 × 40		
	MEB-1K2A48T ABA	●			25.0 A		1,200 W	204 × 127 × 40.5	
	MEB-1K5A48T ABA	●	31.25 A	1,500 W	90-264 V _{AC}	204 × 127 × 40.5			
	MEB-2K5A48T AAA	●	52.1 A	2,500 W	85-264 V _{AC}	310.8 × 127 × 40.5			

*For options, please refer to the technical datasheet

Open Frame Power Supplies

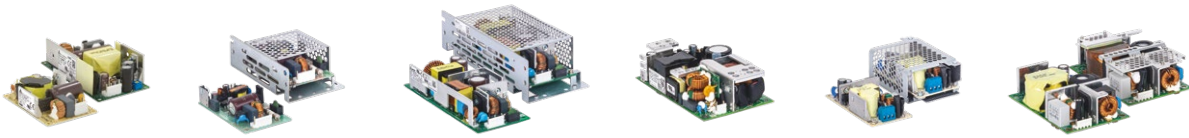

PJT

PJ

PJB

PJH

PJU

PJJ



Series	Model Name*	PFC	Output					Input Voltage Range	Dimensions in mm (L x W x H)	
			Voltage	Convection		Forced Air			Open Frame	Enclosed
				Current	Power	Current	Power			
PJT • High efficiency • Small footprint	PJT-12V40WBA□		12 V	3.33 A	40 W	-	-	90-264 V _{AC}	76.2 × 50.8 × 22.9	-
	PJT-12V65WBA□			5.0 A	60 W	-	-		101.6 × 50.8 × 30	-
	PJT-12V100WBA□	●		8.33 A	100 W	-	-		127 × 76.2 × 31	-
	PJT-12V100WBB□			6.67 A	80 W	8.33 A	100 W		101.6 × 50.8 × 31.8	-
	PJT-15V40WBA□		15 V	2.67 A	40 W	-	-	90-264 V _{AC}	76.2 × 50.8 × 22.9	-
	PJT-15V65WBA□			4.2 A	63 W	-	-		101.6 × 50.8 × 30	-
	PJT-15V100WBA□	●		6.67 A	100 W	-	-		127 × 76.2 × 31	-
	PJT-15V100WBB□			5.33 A	80 W	6.67 A	100 W		101.6 × 50.8 × 31.8	-
	PJT-18V40WBA□		18 V	2.22 A	40 W	-	-	90-264 V _{AC}	76.2 × 50.8 × 22.9	-
	PJT-18V65WBA□			3.61 A	65 W	-	-		101.6 × 50.8 × 30	-
	PJT-18V100WBA□	●		5.55 A	100 W	-	-		127 × 76.2 × 31	-
	PJT-18V100WBB□			4.44 A	80 W	5.55 A	100 W		101.6 × 50.8 × 31.8	-
	PJT-24V40WBA□		24 V	1.66 A	40 W	-	-	90-264 V _{AC}	76.2 × 50.8 × 22.9	-
	PJT-24V65WBA□			2.71 A	65 W	-	-		101.6 × 50.8 × 30	-
	PJT-24V100WBA□	●		4.17 A	100 W	-	-		127 × 76.2 × 31	-
	PJT-24V100WBB□			3.33 A	80 W	4.17 A	100 W		101.6 × 50.8 × 31.8	-
PJT-27V150WBNA	●		V _I : 27 V V _{SB} : 12 V	V _I : 5.55 A V _{SB} : 0.5 A	150 W	-	-	85-264 V _{AC}	127 × 76.2 × 36.5	-
PJ • Built-in PFC • Versatile configurations • Conformal coating	PJ-5V15W□NA		5 V	3.0 A	15 W	-	-	85-264 V _{AC}	87.5 × 50 × 22	107.5 × 60 × 32
	PJ-12V15W□NA		12 V	1.3 A	15.6 W	-	-	85-264 V _{AC}	87.5 × 50 × 22	107.5 × 60 × 32
	PJ-12V30W□NA			2.5 A	30 W	-	-		105 × 50 × 25.6	125 × 60 × 36
	PJ-12V50W□NA	●		4.3 A	51.6 W	-	-		132 × 50 × 26.6	162 × 60 × 36
	PJ-12V100W□□A	●		8.5 A	102 W	-	-	155 × 62 × 33.5	185 × 72 × 45	
	PJ-12V150W□□A	●		12.5 A	150 W	-	-	160 × 75 × 37	188 × 85 × 47	
	PJ-24V30W□NA		24 V	1.25 A	31.2 W	-	-	85-264 V _{AC}	105 × 50 × 25.6	125 × 60 × 36
	PJ-24V50W□NA	●		2.1 A	50.4 W	-	-		132 × 50 × 26.6	162 × 60 × 36
	PJ-24V100W□□A	●		4.3 A	103.2 W	-	-		155 × 62 × 33.5	185 × 72 × 45
	PJ-24V150W□□A	●		6.3 A	150 W	-	-		160 × 75 × 37	188 × 85 × 47
PJ-48V50W□NA	●	48 V	1.1 A	52.8 W	-	-	85-264 V _{AC}	132 × 50 × 26.6	162 × 60 × 36	
PJB • Power Boost up to 10s • Conformal coating	PJB-24V100W□□A	●	24 V	4.3 A	103.2 W	-	-	85-264 V _{AC}	155 × 62 × 33.5	185 × 72 × 45
	PJB-24V150W□□A	●		6.3 A	151.2 W	-	-		160 × 75 × 37	188 × 85 × 47
	PJB-24V240W□□A	●		10.0 A	240 W	-	-		180 × 84 × 42	212 × 98 × 59
	PJB-24V300W□□A	●		12.5 A	300 W	-	-		222 × 95 × 53.6	252 × 108 × 66
PJH • Household and ITE safety approvals	PJH-24V300WBBA	●	V _I : 24 V V _{SB} : 5 V	V _I : 10.0 A V _{SB} : 1.2 A	240 W	V _I : 12.5 A V _{SB} : 1.2 A	300 W	90-264 V _{AC}	127 × 76.2 × 35.8	-
	PJH-24V300WBCA	●	V _I : 24 V V _{SB} : 12 V	V _I : 10.0 A V _{SB} : 0.5 A	240 W	V _I : 12.5 A V _{SB} : 0.5 A	300 W		127 × 76.2 × 35.8	-
	PJH-36V300WBBA	●	V _I : 36 V V _{SB} : 5 V	V _I : 6.66 A V _{SB} : 1.2 A	240 W	V _I : 8.33 A V _{SB} : 1.2 A	300 W	90-264 V _{AC}	127 × 76.2 × 35.8	-
	PJH-36V300WBCA	●	V _I : 36 V V _{SB} : 12 V	V _I : 6.66 A V _{SB} : 0.5 A	240 W	V _I : 8.33 A V _{SB} : 0.5 A	300 W		127 × 76.2 × 35.8	-
PJU • Power supply with integrated DC-UPS • Compact size	PJU-13V60W□A□		V _I : 13.8 V B+: 13.6 V	V _I : 3.9 A	60 W	-	-	90-264 V _{AC}	101.6 × 50.8 × 30.6	103.4 × 62 × 37
	PJU-13V60W□B□			B+: 0.4 A					101.6 × 50.8 × 30.6	103.4 × 62 × 37
	PJU-27V60W□A□		V _I : 27.6 V B+: 27.4 V	V _I : 1.75 A	60 W	-	-	90-264 V _{AC}	101.6 × 50.8 × 30.6	103.4 × 62 × 37
	PJU-27V60W□B□			B+: 0.4 A					101.6 × 50.8 × 30.6	103.4 × 62 × 37
PJJ • UL 8750, IEC/UL62368-1 approvals • Low inrush current • LED lighting power solution	PJJ-48V200WBAA	●	48 V	3.125 A	150 W	4.17 A	200 W	85-305 V _{AC}	127.6 × 76.2 × 34.8	-
	PJJ-48V400WBAA	●		4.165 A	200 W	8.33 A	400 W		127 × 76.6 × 40.8	-
	PJJ-48V600WLAA	●		6.25 A	300 W	12.5 A	600 W		177.8 × 101.6 × 41	-

*For options, please refer to the technical datasheet

DIN Rail Modules



Redundancy Module



Buffer Module



DC-UPS Module



Battery Module



Product Type	Series	Model Name*	Output		Input Current	Input Voltage Range	Dimensions in mm (H x W x D)	
			Voltage	Current				
Redundancy Module	CliQ II	DRR-20A	22-60 V	20.0 A	(1+1 Redundancy) = Nominal 2 x 12.5 A (N+1 Redundancy) = Nominal 2 x 10 A	22-60 V _{DC}	121 x 50 x 122.1	
		DRR-20N					121 x 50 x 122.1	
		DRR-40A	22-60 V	40.0 A			(1+1 Redundancy) = Nominal 2 x 25 A (N+1 Redundancy) = Nominal 2 x 20 A	121 x 50 x 122.1
		DRR-40N						121 x 50 x 122.1
Buffer Module	CliQ II	DRB-24V020AB□	24 V	20.0 A	Charging Mode: < 0.6 A	22.8-28.8 V _{DC}		121 x 70 x 120.1
		DRB-24V040ABN		40.0 A				Charging Mode: < 0.6 A
DC-UPS Module	CliQ II	DRU-24V40ABN	24 V	40.0 A	Charging Mode: 2.0 A ± 1.0 A	24-28 V _{DC}	121 x 50 x 117.3	
	CHROME	DRU-24V10ACZ	24 V	10.0 A	Charging Mode: 0.5 A ± 0.1 A	24-28 V _{DC}	91 x 71 x 55.6	
	CliQ M	DRU-24V10AMN	24 V	10.0 A	0.5 A, 1 A, 1.5 A, 2 A (typ.) (constant current)	18-30 V _{DC}	124 x 38 x 117	
		DRU-24V20AMN			20.0 A		0.75 A, 1.5 A, 2.25 A, 3 A (typ.) (constant current)	124 x 38 x 117
		DRU-24V40AMN			40.0 A		1 A, 2 A, 3 A, 4 A (typ.) (constant current)	124 x 50 x 117

*For options, please refer to the technical datasheet

Product Type	Series	Model Name	Nominal Voltage	Charging Current	Discharging Current	Dimensions in mm (H x W x D)
Battery Module	CliQ M	DRN-24V7AAEN	24 V	2.1 A Max	40.0 A Max	211.5 x 148 x 109.2

Adapter



ADT



Series	Model Name	CC Code	Output			Input Voltage Range	Dimensions in mm (L x W x H)
			Voltage	Current	Power		
ADT • Compact size • DoE Level VI and CoC Tier 2	ADT-060A12AA	B-A	12 V	5.0 A	60 W	85-264 V _{AC}	108 x 46 x 29.5
	ADT-060A12AB	B-A		5.0 A	60 W		108 x 46 x 29.5
	ADT-150B12AA	J-A	15 V	12.5 A	150 W	90-264 V _{AC}	155 x 76 x 30
	ADT-060A15AA	B-A		4.0 A	60 W	85-264 V _{AC}	108 x 46 x 29.5
	ADT-060A15AB	B-A	4.0 A	60 W	108 x 46 x 29.5		
	ADT-060A19AA	B-A	19 V	3.2 A	60.8 W	85-264 V _{AC}	108 x 46 x 29.5
	ADT-060A19AB	B-A		3.2 A	60.8 W		108 x 46 x 29.5
	ADT-120A19AA	M-A	19 V	6.15 A	120 W	90-264 V _{AC}	138 x 68.5 x 24.5
	ADT-150A19AA	G-A		7.7 A	150 W		160 x 76.2 x 25.8
	ADT-060A24AA	B-A	24 V	2.5 A	60 W	85-264 V _{AC}	108 x 46 x 29.5
	ADT-060A24AB	B-A			60 W		108 x 46 x 29.5
	ADT-090A24AA	F-A	24 V	2.5 A	90 W	90-264 V _{AC}	126 x 51 x 30
	ADT-120A24AA	F-A			120 W		138 x 68.5 x 24.5
	ADT-150A24AA	H-A			150 W		160 x 76.2 x 25.8
	ADT-150C24AC	K-A			150 W		165.1 x 76.1 x 31.5

Global Operation & Service

Asia

Delta Electronics, Inc.

3 Tungyuan Road, Chungli Industrial Zone,
Taoyuan County 32063, Taiwan, R.O.C.

TEL: +886 3 452 6107
FAX: +886 3 452 7314

Delta Electronics (Shanghai) Co., Ltd China Headquarters

No. 182 Minyu Road, Pudong,
Shanghai, P.R.C. 201209

TEL: +86 21 6872 3988
FAX: +86 21 6872 3996

Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate
(E.P.Z.), Pattana 1 Rd., T. Phrakasa, A. Muang,
Samutprakarn 10280, Thailand

TEL: +66 2 709 2800
FAX: +66 2 709 2827

Delta Electronics India Pvt. Ltd.

Plot No. 43, Sector - 35, HSIIDC,
Gurgaon, Haryana 122001

TEL: +91 124 4874 900
+91 124 4169 040
FAX: +91 124 4874 945

Delta Electronics (Japan), Inc.

2-1-14 Minato-ku Shibadaimon,
Tokyo, 105-0012, Japan

TEL: +81 3 5733 1111
FAX: +81 3 5733 1211

Delta Electronics (Korea), Inc.

1504, Byucksan Digital Valley 6-Cha,
Gasan-dong, Geumcheon-gu, Seoul,
153-704, Korea

TEL: +82 2 515 5303
+82 2 515 5305
FAX: +82 2 515 5302

Delta Electronics (Australia) Pty Ltd

20-21, 45 Normanby Rd.
Nothing Hill, VIC 3168, Australia

TEL: +61 9543 3720
FAX: +61 9544 0606

Delta Energy Systems (Singapore) Pte Ltd

4 Kaki Bukit Avenue 1
#05-04, Singapore 417939

TEL: +65 6747 5155
FAX: +65 6744 9228

North America

Delta Electronics (Americas) Ltd. North American Headquarters

46101 Fremont Blvd.
Fremont, CA 94538, U.S.A.

TEL: +1 510 668 5100
FAX: +1 510 668 0680

Central & South America

Delta Electronics International Mexico S.A. de C.V.

Centrum Park, Av. Gustavo Baz Prada 309
Edificio E Planta Baja, Col. La Loma, C.P.

54030 Tlalnepantla, Estado de México
TEL: +52 55 3603 9200

Delta Electronics (Brasil) Ltda

Estrada Velha Rio São Paulo, 5300-
Eugênio de Melo, 12247-001-São José dos
Campos-SP- Brasil

TEL: +55 12 3932 2300

Europe

Delta Electronics (Netherlands) B.V. EMEA Headquarters

Zandsteen 15
2132 MZ Hoofddorp, The Netherlands

TEL: +31 20 800 3900

Automotive Campus 260
5708 JZ Helmond, The Netherlands

TEL: +31 40 800 3900

Delta Greentech Elektronik (Turkey)

Şerifali Mah. Hendem Cad. Kule Sok. No: 16-A,
Ümraniye, İstanbul, Turkey

TEL: +90 216 499 99 10
FAX: +90 216 499 80 70

Authorized Distributor:



www.DeltaPSU.com

November 2023 (Rev. 00) - All information and specifications are subjected to change without prior notice.