

## 3.3 kW Wireless Charging System

### MOOV<sup>air</sup> 03

Highly efficient wireless charging for industrial applications including electric vehicles.

- 3,300 W charging for 24V, 36V and 48V batteries
- Safe and robust
- Fully automated charging

# 3.3 kW Wireless Charging System

## Ready for Industry 4.0

- Charge control and status data available via a range of convenient methods
- Suitable for in-process and opportunity charging
- Safe & unmanned 24/7 operation


## Versatile Charging

Charge any battery type


- Lithium or lead acid
- Option for temperature compensation
- Models for 24V, 36V and 48V batteries

## Wireless Power Transfer

- Efficiency meets traditional wired chargers
- No connector wear means no maintenance downtime
- No sparks or exposed metal contacts

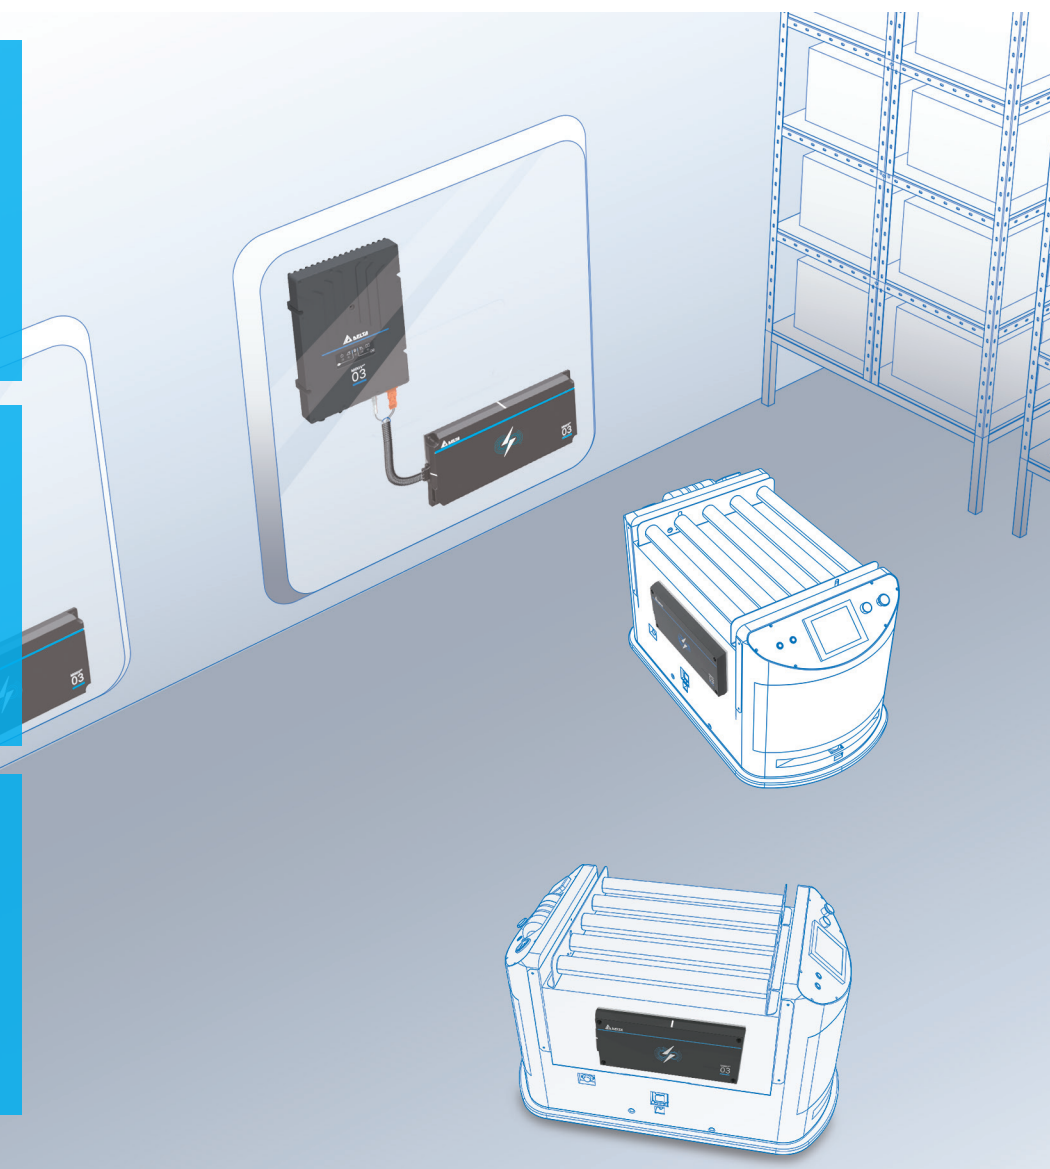

## Product Overview

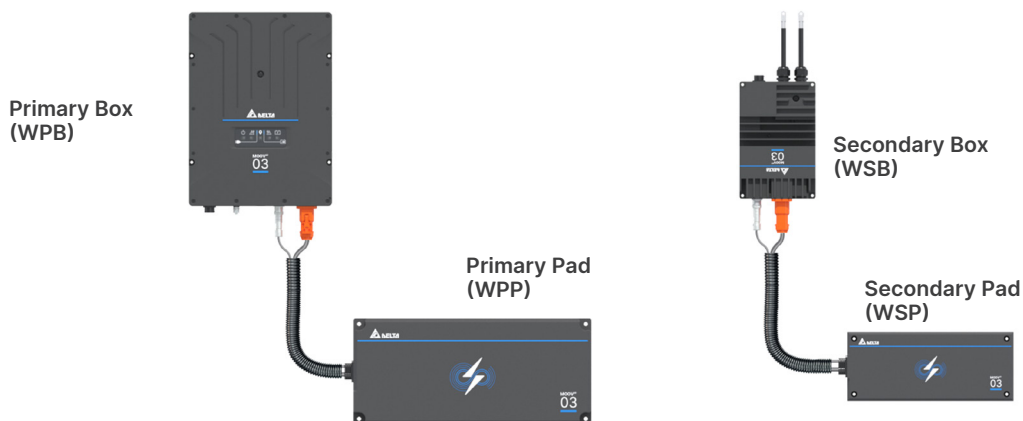

# Specifications

Part Number		MOOV <sup>air</sup> 03		
<b>AC Input</b>				
AC Input Rated Voltage	200 to 240 V <sub>AC</sub> 1PH			
AC Input Voltage Range	180 to 264 V <sub>AC</sub> 1PH			
AC Input Frequency	47 to 63 Hz			
Maximum AC Input Current	16 A			
Power Factor (100% Load)	> 0.99			
Peak Efficiency	> 92%			
Standby Power <sup>1</sup>	≤ 10 W <sup>2</sup>			
<b>DC Output</b>				
DC Output Nominal Voltage	24 V <sub>DC</sub>	36V <sub>DC</sub>	48 V <sub>DC</sub>	
DC Output Voltage Range	12 to 33 V <sub>DC</sub>	18 to 49.5 V <sub>DC</sub>	24 to 66 V <sub>DC</sub>	
Maximum Charge Current	132 A	88 A	66 A	
Maximum Output Power	3,300 W			
Battery Type	Lithium Ion, Lead Acid (AGM / GEL)			
Output Protection	Over voltage, over current, short circuit, reverse connection			
Parallel Operation	Up to 2 chargers for a maximum of 6.6 kW			
Standby Power <sup>3</sup>	≤ 3 W			
Charge Modes	Set points from vehicle	CANopen <sup>®</sup>		
	Set points from infrastructure	Ethernet		
	Pre-programmed standalone operation	User programmable CC-CV profile Multi-stage charge profile		
<b>Environmental Conditions</b>				
Operating Temperature <sup>4</sup>	WPB and WPP	-40 °C to +40 °C (-40 °F to 104 °F)		
	WSB and WSP	-40 °C to +70 °C (-40 °F to 150 °F)		
Storage Temperature	-45 °C to +70 °C (-49 °F to 158 °F)			
Relative Humidity	4% to 100% non-condensing			
Maximum Operating Altitude	3,000 m (9,842 ft)			
Ingress Protection	WPB	IP65		
	WPP and WSP	IP67		
	WSB	IP65		
<b>Mechanical Design</b>				
Pad Air Gap Range	10 mm to 30 mm (0.4 to 1.2 in)			
Maximum Misalignment	25 mm (1.0 in)			
Dimensions (L x W x H)	WPB	420 x 310 x 68 mm (16.5 x 12.2 x 2.7 in)		
	WPP	230 x 515 x 44 mm (9.1 x 20.3 x 1.7 in)		
	WSP	150 x 360 x 32 mm (5.9 x 14.2 x 1.3 in)		
	WSB	254 x 165 x 51 mm (10.0 x 6.5 x 2.0 in)		
Weight	WPB and WPP	20 kg (44.1 lbs)		
	WSB and WSP	8 kg (17.6 lbs)		
Cable Length	WPP	2.0 m (78.7 in)		
	WSP	1.0 m (39.4 in)		
	DC output	1.05 m (43.3 in)		
Cooling	Natural convection			
Status LEDs	WPB			

Approvals and Compliance <sup>5</sup>	Europe	USA	Canada
Safety Marks	CE	cMET <sub>US</sub>	Pending
Safety	Pending	Pending	Pending
EMC	CISPR 11, IEC 61000-6-2	FCC part 18 subpart C	Pending
RF	Pending		
EMF	Pending		

1. WPB connected to AC but not charging.
2. CEC requirement. Actual figure not yet available and will likely to be lower
3. Secondary box connected to battery and not charging and not in Sleep mode
4. Derating above 40 °C (TBC)
5. The full list of standards to be applied are pending



More information

## Delta Energy Systems (Germany) GmbH

Tscheulinstrasse 21, 79331 Teningen

E-mail: IEV.sales@deltaww.com

[www.deltaww.com](http://www.deltaww.com)

March 2024 Revision 3.0

